

## Rotary tiller for intensive use

# 204 S

NEW



Ideal for demanding home gardeners to prepare the soil for sowing. This model features two forward speeds and one reverse, the perfect combination for the most difficult jobs.



Practical and ergonomic external gear selector.



Handlebars with vertical adjustment to allow the operator to assume the correct posture while working.




85 cm rotor with lateral protection discs.

Power supply	Engine	Model	Displacement	Power*	Starting	Code
gasoline	Emak	K 800 HC OHV	182 cm <sup>3</sup>	5.7 HP	recoil start	68589005EN

\* Engine power data refers to the values declared by each manufacturer. These values are calculated in accordance with specific measurement standards (such as SAE J1940, SAE J1349, ISO 1585) and may be modified without prior notice.

### Focus on accessories

	<b>Furrowing tool</b> Code <b>69209081</b> (requires tool holder <b>69209088</b> )
	<b>Plough</b> Code <b>69209082</b> (requires tool holder <b>69209088</b> )
	<b>Potato digger</b> Code <b>69209083</b> (requires tool holder <b>69209088</b> )
	<b>Pair of metal wheels</b> Code <b>69209085</b>
	<b>Pair of tyred wheels 3.50-6\"</b> Code <b>69209089</b>
	<b>Pair of tyred wheels 3.50-8\"</b> Code <b>69209114</b>

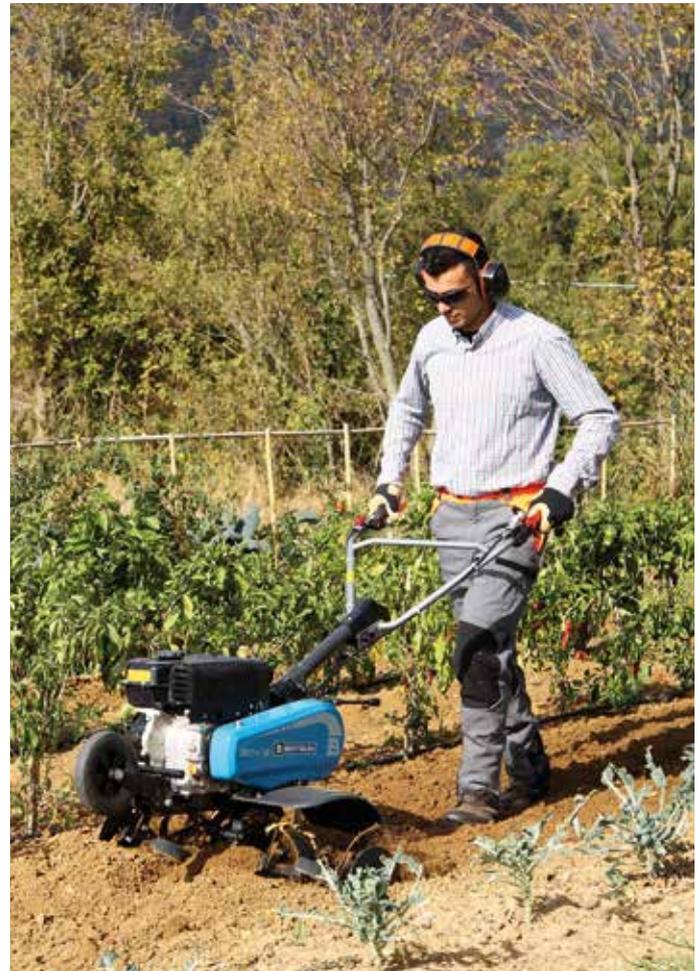


### Gearbox/ Speed (km/h):

#### 3-speed (2 forward + 1 reverse)

Speed (km/h)	4.70 <b>1</b>	<b>1R</b> 3.50
	6.50 <b>2</b>	
Rotor speed with engine at 3400 rpm	83 <b>1</b>	<b>1R</b> 62
	114 <b>2</b>	

### Dimensions (mm)



L1	1500
H1	800
W1	850

Transmission	oil-bath gearbox and chain
Clutch	belt with tensioner
Handlebars	with vertical adjustment
Rotor	85 cm with lateral protection discs
Power take-off	no
Jackleg	yes
Towing hitch	yes
Transport wheel	yes
Weight	72 kg