

Rotary cultivator for intensive use

407 S*

NEW



Thanks to the differential with locking lever on the handlebars, which affords perfect manoeuvrability and grip even on the most difficult terrain and on slopes, the key strength of this machine is its ease of use. The facility to use a range of different accessories for tillage, grass cutting and maintenance of gardens or urban spaces makes these machines exceptionally versatile and perfectly adapted to meet the needs of demanding home users and smallholders.

* available from spring



Ergonomically positioned easy action levers for differential locking and reverse shuttle.



Independent brakes on each wheel and handlebar steering to facilitate travel on even the most difficult terrain.



QuickFit coupling that allows the operator to change the tools without using tools.

Power supply	Engine	Model	Displacement	Power*	Starting	Code
gasoline	POWERED BY HONDA	GX 200 OHV	196 cm ³	5.8 HP	recoil start	68359100EN
gasoline	Emak	K 800 H OHV	182 cm ³	5.7 HP	recoil start	68359101EN
gasoline	KOHLER	CH 270 OHV	208 cm ³	7.0 HP	recoil start	68359104EN
diesel	KIPOR	KM 178	296 cm ³	5.5 HP	recoil start	68359105EN

* Engine power data refers to the values declared by each manufacturer. These values are calculated in accordance with specific measurement standards (such as SAE J1940, SAE J1349, ISO 1585) and may be modified without prior notice.

Focus on accessories



Rotor Ø 280, 60-50-(40) cm
16 spikes
Quickfit included
(can be reduced to 40 cm with kit **69210259**)
Code **69219089**



Turbine L 60 cm
Two stages
Adjustable ejector chute
Quickfit coupling
(requires QuickFit **69212006**)
Code **L0026200**



Flail mower L 65 cm
24 'Y' shaped knives
Integral safety brake
Quickfit coupling
(requires QuickFit **69212006**)
Code **L0091000**




WITH ROTARY CULTIVATOR

Gearbox/ Speed (km/h):

4-speed (2 forward + 2 reverse) with 4.00-10" wheels

Speed (km/h)	1.20	1	1R	1.27
	2.52	2	2R	2.66

Dimensions (mm)

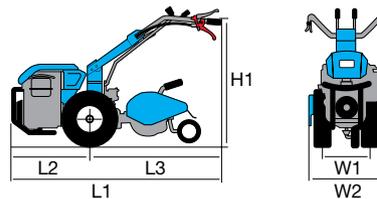

L1	1780
L2	570
L3	1210
H1	1340-470
W1	370
W2	700-400


WITH CUTTERBAR MOWER

Gearbox/ Speed (km/h):

4-speed (2 forward + 2 reverse) with 4.00-10" wheels

Speed (km/h)	1.27	1	1R	1.20
	2.66	2	2R	2.52

Dimensions (mm)

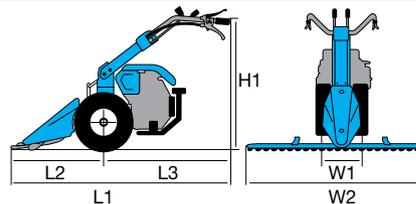

L1	1690
L2	900
L3	790
H1	1440-620
W1	370
W2	1420-950

Transmission	with oil-bath gearbox
Clutch	dry bevel type
Handlebars	with vertical and horizontal adjustment and 180° reversible, with vibration-damping device
Reverse gear	yes, with handlebar lever
Differential	yes
Brakes	yes
Power take-off	independent 973 rpm
Accessories installation	QuickFit (optional)
Towing hitch	yes
Cowling	no
Weight	120 kg (with engine, rotor and wheels)

Accessories



407 S

Accessory	Optional accessory
 <p>Rotor Ø 280, 60-50-(40) cm 16 spikes Fixed coupling (can be reduced to 40 cm with kit 69210259)</p>	 <p>Support wheel Z0020368</p>  <p>Rear-mounted furrowing tool L0009800</p>
 <p>Rotor Ø 280, 60-50-(40) cm 16 spikes Quickfit included (can be reduced to 40 cm with kit 69210259)</p>	 <p>Support wheel Z0020368</p>  <p>Rear-mounted furrowing tool L0009800</p>
 <p>Rotor Ø 320, (80)-70-60-(50) cm 20 spikes Quickfit included Support wheel included (expandable to 80 cm with kit 69210231) (can be reduced to 50 cm with kit 69210229)</p>	 <p>Rear-mounted furrowing tool L0009800</p>
 <p>Rotor Ø 320, (80)-70-60-(50) cm 20 spikes Fixed coupling Support wheel included (expandable to 80 cm with kit 69210231) (can be reduced to 50 cm with kit 69210229)</p>	 <p>Rear-mounted furrowing tool L0009800</p>



Accessories

Accessory		Optional accessory		
Tyred wheels				
 <p>Pair of tyred wheels 4.00x8" Fixed disc</p>	69209025B	 <p>Screw-adjustable half-shafts</p>	69209105	
		 <p>5-hole adjustable half-shafts</p>	L0059500	
		 <p>Pair of spacers L 50 mm</p>	69209094	
		 <p>Pair of snow chains</p>	L1055015	
 <p>Pair of tyred wheels 4.00x10" Fixed disc</p>	69200024A	 <p>Screw-adjustable half-shafts</p>	69209105	
		 <p>5-hole adjustable half-shafts</p>	L0059500	
		 <p>Pair of spacers L 50 mm</p>	69209094	
		 <p>Pair of snow chains</p>	L0021600	
 <p>Pair of tyred wheels 4.00x10" Adjustable disc</p>	69209004B	 <p>Pair of 15 kg ballasts (not compatible with adjustable half-shafts)</p>	69209099	
		 <p>Pair of 15 kg ballasts (compatible with adjustable half-shafts)</p>	Z0020321	
		 <p>Screw-adjustable half-shafts</p>	69209105	
		 <p>5-hole adjustable half-shafts</p>	L0059500	
		 <p>Pair of spacers L 50 mm</p>	69209094	
		 <p>Pair of snow chains</p>	L0021600	
 <p>Pair of tyred wheels 5.00x10" Adjustable disc</p>	69209003B	 <p>Pair of 15 kg ballasts (not compatible with adjustable half-shafts)</p>	69209099	
		 <p>Pair of 15 kg ballasts (compatible with adjustable half-shafts)</p>	Z0020321	
		 <p>Screw-adjustable half-shafts</p>	69209105	
		 <p>5-hole adjustable half-shafts</p>	L0059500	
		 <p>Pair of spacers L 50 mm</p>	69209094	
		 <p>Pair of snow chains</p>	L0030200	
 <p>Pair of tyred wheels 16-6.50x8" Fixed disc</p>	69209012A	 <p>Screw-adjustable half-shafts</p>	69209105	
		 <p>5-hole adjustable half-shafts</p>	L0059500	

Accessories



407 S

Accessory		Optional accessory			
Steel wheels					
	Pair of steel wheels Ø 480x100 mm	69209067		Pair of width adjustment rings W 100 mm	L0040100
				Screw-adjustable half-shafts	69209105
				5-hole adjustable half-shafts	L0059500
				Pair of spacers L 50 mm	69209094
Adjustable tool holder					
	Adjustable tool holder	L1055001A		Single share plough	Z0020102
				Furrowing tool	Z0020133
				Potato digger	L0066400
Drives and Cutter plates					
	Oil-immersed drive	69229096		0.95 m Complete central cutter plate Semi-fine teeth	69229084
				1.15 m Complete central cutter plate Semi-fine teeth	69229085
				1.27 m Complete central cutter plate Semi-fine teeth	69229086
				1.40 m Complete central cutter plate Semi-fine teeth	69229087
				0.95 m Complete central cutter plate Special teeth	69229068
				1.15 m Complete central cutter plate Special teeth	69229069
				1.27 m Complete central cutter plate Special teeth	69229070
				1.40 m Complete central cutter plate Special teeth	69229071
				1.22 m Complete central cutter plate " UNIVERSAL " ESM (requires kit L0058900)	69229036
				1.42 m Complete central cutter plate " UNIVERSAL " ESM (requires kit L0058900)	69229021
				1.02 m Complete central cutter plate " KOMUNAL " ESM (requires kit L0058900)	L0066900
				1.22 m Complete central cutter plate " KOMUNAL " ESM (requires kit L0058900)	69229037
				1.42 m Complete central cutter plate " KOMUNAL " ESM (requires kit L0058900)	69229038
				Ballast for oil-immersed drive	L0105700
	Directional guides for semi-fine tooth cutter plate	69229064			



Accessories

Accessory		Optional accessory		
Front shovel				
	<p>Front shovel L 100x40 cm Quickfit coupling With horizontal and vertical adjustment (requires QuickFit 69212006)</p>	69209065		
Snow thrower				
	<p>Turbine L 60 cm Two stages Adjustable ejector chute Quickfit coupling (requires QuickFit 69212006)</p>	L0026200		
Front brush				
	<p>Brush L 100xØ 35 cm With horizontal and vertical adjustment Quickfit coupling (requires QuickFit 69212006)</p>	L0094200		
Rotor type flail mower				
	<p>Flail mower L 65 cm 24 'Y' shaped knives Integral safety brake Quickfit coupling (requires QuickFit 69212006)</p>	L0091000		
Trailer				
	<p>Towed trailer with handlebar steering Load box dimensions 1.25x0.95 m Load box depth 30 cm Wheels 145x70-8" Max load capacity 300 kg Pedal operated brake Parking handbrake Dump box Collapsible tailgate (not homologated for road use)</p>	L0018601		
QuickFit				
	QuickFit coupling	69212006		